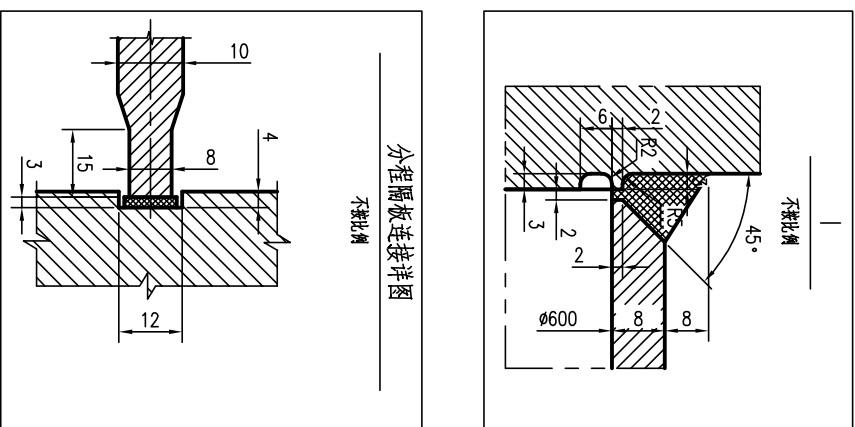
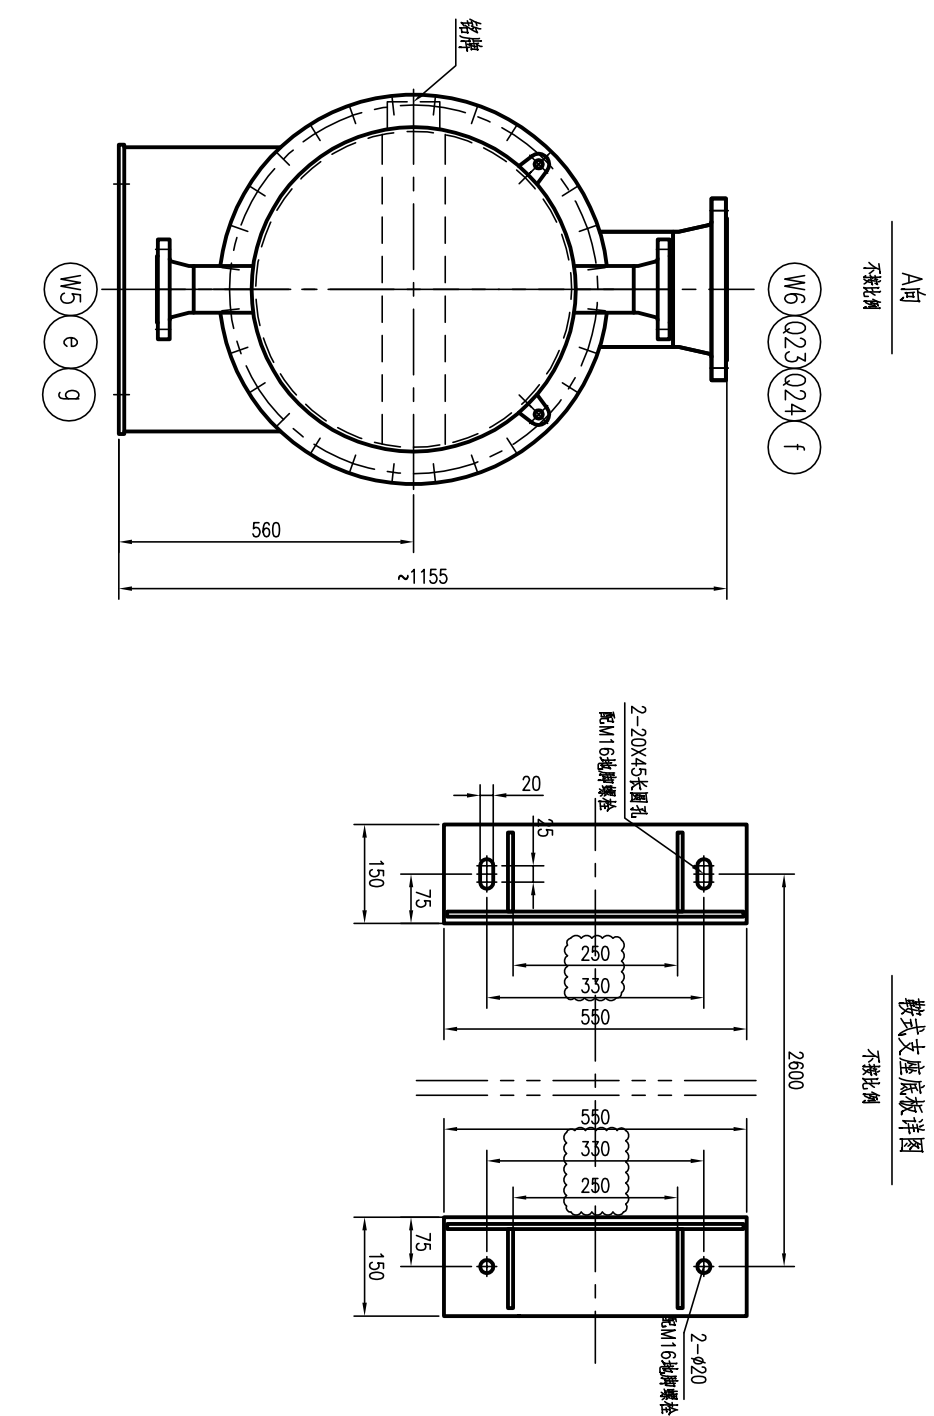


[illegible]

ITEM NO.	QTY	UNIT	DESCRIPTION	REMARK
1	2	KG	16mm 19.1 36.2	
2	2	KG	16mm 19.1 36.2	
3	2	KG	16mm 19.1 36.2	
4	2	KG	16mm 19.1 36.2	
5	2	KG	16mm 19.1 36.2	
6	2	KG	16mm 19.1 36.2	
7	2	KG	16mm 19.1 36.2	
8	2	KG	16mm 19.1 36.2	
9	2	KG	16mm 19.1 36.2	
10	2	KG	16mm 19.1 36.2	
11	2	KG	16mm 19.1 36.2	
12	2	KG	16mm 19.1 36.2	
13	2	KG	16mm 19.1 36.2	
14	2	KG	16mm 19.1 36.2	
15	2	KG	16mm 19.1 36.2	
16	2	KG	16mm 19.1 36.2	
17	2	KG	16mm 19.1 36.2	
18	2	KG	16mm 19.1 36.2	
19	2	KG	16mm 19.1 36.2	
20	2	KG	16mm 19.1 36.2	
21	2	KG	16mm 19.1 36.2	
22	2	KG	16mm 19.1 36.2	
23	2	KG	16mm 19.1 36.2	
24	2	KG	16mm 19.1 36.2	
25	2	KG	16mm 19.1 36.2	
26	2	KG	16mm 19.1 36.2	
27	2	KG	16mm 19.1 36.2	
28	2	KG	16mm 19.1 36.2	
29	2	KG	16mm 19.1 36.2	
30	2	KG	16mm 19.1 36.2	
31	2	KG	16mm 19.1 36.2	
32	2	KG	16mm 19.1 36.2	
33	2	KG	16mm 19.1 36.2	
34	2	KG	16mm 19.1 36.2	
35	2	KG	16mm 19.1 36.2	
36	2	KG	16mm 19.1 36.2	
37	2	KG	16mm 19.1 36.2	
38	2	KG	16mm 19.1 36.2	
39	2	KG	16mm 19.1 36.2	
40	2	KG	16mm 19.1 36.2	
41	2	KG	16mm 19.1 36.2	
42	2	KG	16mm 19.1 36.2	
43	2	KG	16mm 19.1 36.2	
44	2	KG	16mm 19.1 36.2	
45	2	KG	16mm 19.1 36.2	
46	2	KG	16mm 19.1 36.2	
47	2	KG	16mm 19.1 36.2	
48	2	KG	16mm 19.1 36.2	
49	2	KG	16mm 19.1 36.2	
50	2	KG	16mm 19.1 36.2	
51	2	KG	16mm 19.1 36.2	
52	2	KG	16mm 19.1 36.2	
53	2	KG	16mm 19.1 36.2	
54	2	KG	16mm 19.1 36.2	
55	2	KG	16mm 19.1 36.2	
56	2	KG	16mm 19.1 36.2	
57	2	KG	16mm 19.1 36.2	
58	2	KG	16mm 19.1 36.2	
59	2	KG	16mm 19.1 36.2	
60	2	KG	16mm 19.1 36.2	
61	2	KG	16mm 19.1 36.2	
62	2	KG	16mm 19.1 36.2	
63	2	KG	16mm 19.1 36.2	
64	2	KG	16mm 19.1 36.2	
65	2	KG	16mm 19.1 36.2	
66	2	KG	16mm 19.1 36.2	
67	2	KG	16mm 19.1 36.2	
68	2	KG	16mm 19.1 36.2	
69	2	KG	16mm 19.1 36.2	
70	2	KG	16mm 19.1 36.2	
71	2	KG	16mm 19.1 36.2	
72	2	KG	16mm 19.1 36.2	
73	2	KG	16mm 19.1 36.2	
74	2	KG	16mm 19.1 36.2	
75	2	KG	16mm 19.1 36.2	
76	2	KG	16mm 19.1 36.2	
77	2	KG	16mm 19.1 36.2	
78	2	KG	16mm 19.1 36.2	
79	2	KG	16mm 19.1 36.2	
80	2	KG	16mm 19.1 36.2	
81	2	KG	16mm 19.1 36.2	
82	2	KG	16mm 19.1 36.2	
83	2	KG	16mm 19.1 36.2	
84	2	KG	16mm 19.1 36.2	
85	2	KG	16mm 19.1 36.2	
86	2	KG	16mm 19.1 36.2	
87	2	KG	16mm 19.1 36.2	
88	2	KG	16mm 19.1 36.2	
89	2	KG	16mm 19.1 36.2	
90	2	KG	16mm 19.1 36.2	
91	2	KG	16mm 19.1 36.2	
92	2	KG	16mm 19.1 36.2	
93	2	KG	16mm 19.1 36.2	
94	2	KG	16mm 19.1 36.2	
95	2	KG	16mm 19.1 36.2	
96	2	KG	16mm 19.1 36.2	
97	2	KG	16mm 19.1 36.2	
98	2	KG	16mm 19.1 36.2	
99	2	KG	16mm 19.1 36.2	
100	2	KG	16mm 19.1 36.2	

管口材料表									
NOZZLE MATERIAL									
ITEM NO.	图号或料号	NAME AND SPECIFICATION	数量	材料	重量 (kg)	重量 (lb)	备注	REMARK	
23	表B/T 4712.1-2007	鞍座 B1 600-S, n=252	1	Q235B/Q345R		30			
22	表B/T 4712.1-2007	鞍座 B1 600-F, n=252	1	Q235B/Q345R		30			
21	GB/T 23198-2023	槽钢 耳头 E4400X8(7)	1	Q345R		27.5			
20		槽钢 DN600 δ=8 L=195	1	Q345R		23.4			
19	NB/T 47023-2012	设备法兰 FM 600-1.0	1	16MnII		59.9			
18	GB/T29463-2023	垫片 NM607-600-1.0	1	RSB		—			
17	T7260xx-1	右管板	1	S30408		100.1			
16	T7260xx-1	法兰2 M12X330	3	Q235B		2.9	8.7		
15	GB/T 6170-2015	螺栓 M12	16	8级		0.02	0.3		
14	T7260xx-1	拉杆 M12X2970	1	Q235B		2.9			
13	GB/T 13286-2023	垫圈 φ19X2 L=4000	416	S30408		3,388	1409		
12		筒节 DN600 δ=8 L=3906	1	Q345R		4.69			
11		定距板4 φ19X2	16	20		0.27	4.22	L=324	
10		定距板3 φ19X2	7	20		0.55	3.85	L=654	
9	T7260xx-1	拉紧板 t=6	9	Q235B		4.4	33.6		
8		塔顶加强筋	1	L2/Q235B			1.3	塔顶工厂	
7		定距板2 φ19X2	1	20			0.78	L=930	
6		定距板1 φ19X2	3	20		0.5	1.5	L=600	
5	T7260xx-1	左管板	1	S30408		100.1			
4	GB/T29463-2023	垫片 NM607-600-1.0-2	1	RSB					
3	NB/T 47027-2012	螺栓 M20	112	40Mn		0.06	6.7		
2	NB/T 47027-2012	螺栓 M20X145-B	56	40Mn		0.3	16.8		
1	T7260xx-1	左管柱	1	组合COMP.		145.8			

[illegible]

附录 表			
LIST OF WELDING ROD			
02356,20	0235R,20	0345R, 16Mn	S30408
02356,20	J427		
0345R, 16Mn	J427	J507	
S30408	A302	A302	A102

		管 口 表		LIST OF NOZZEL			
特 性	公称尺寸 NOM. SIZE	公称压力 CLASS.	连接标准 CONN. STDS.	连接形式 CONN. FORM	连接形式 CONN. FORM	用途名称 SERVICE	外伸高度 EXT. HGT.
Q23	200	150	H6/120615-2009	WN	RF	气气入口	287
Q24	200	150	H6/120615-2009	WN	RF	气液出口	287
W5	80	150	H6/120615-2009	WN	RF	液液水出口	180
W6	80	150	H6/120615-2009	WN	RF	液液水出口	180
e	25	150	H6/120615-2009	WN	RF	液液出口	120
f	25	150	H6/120615-2009	WN	RF	液液出口	120
g	25	150	H6/120615-2009	WN	RF	液液出口	120

[illegible]

投針角距離	針ノミ間隔	約25/45
共中	不織網	SS
空位重量	Empty mass	約25/45
機材重量	OFFSHORE MASS	約1
流石重量	MASS OF TAIL WEIGHT	約2/25
流石の材料重量	MASS EXCLUDING TAIL WEIGHT	約1

[illegible]