CE IEC/EN 60947-1/-2/4-1

0102 PTB 01 ATEX 3307

Ex II (2) GD

12,5-16A AC3

200-280A

Uimp : 6kV

ME 01 A033595

AHCR厌氧高效厌氧混合反应器 10 90

MS325-16 3UA5240-1K/9.2A kA

3TF3211(16A) ALH-301 4KW DA

30/5 mbH

二次:YL006 ANY

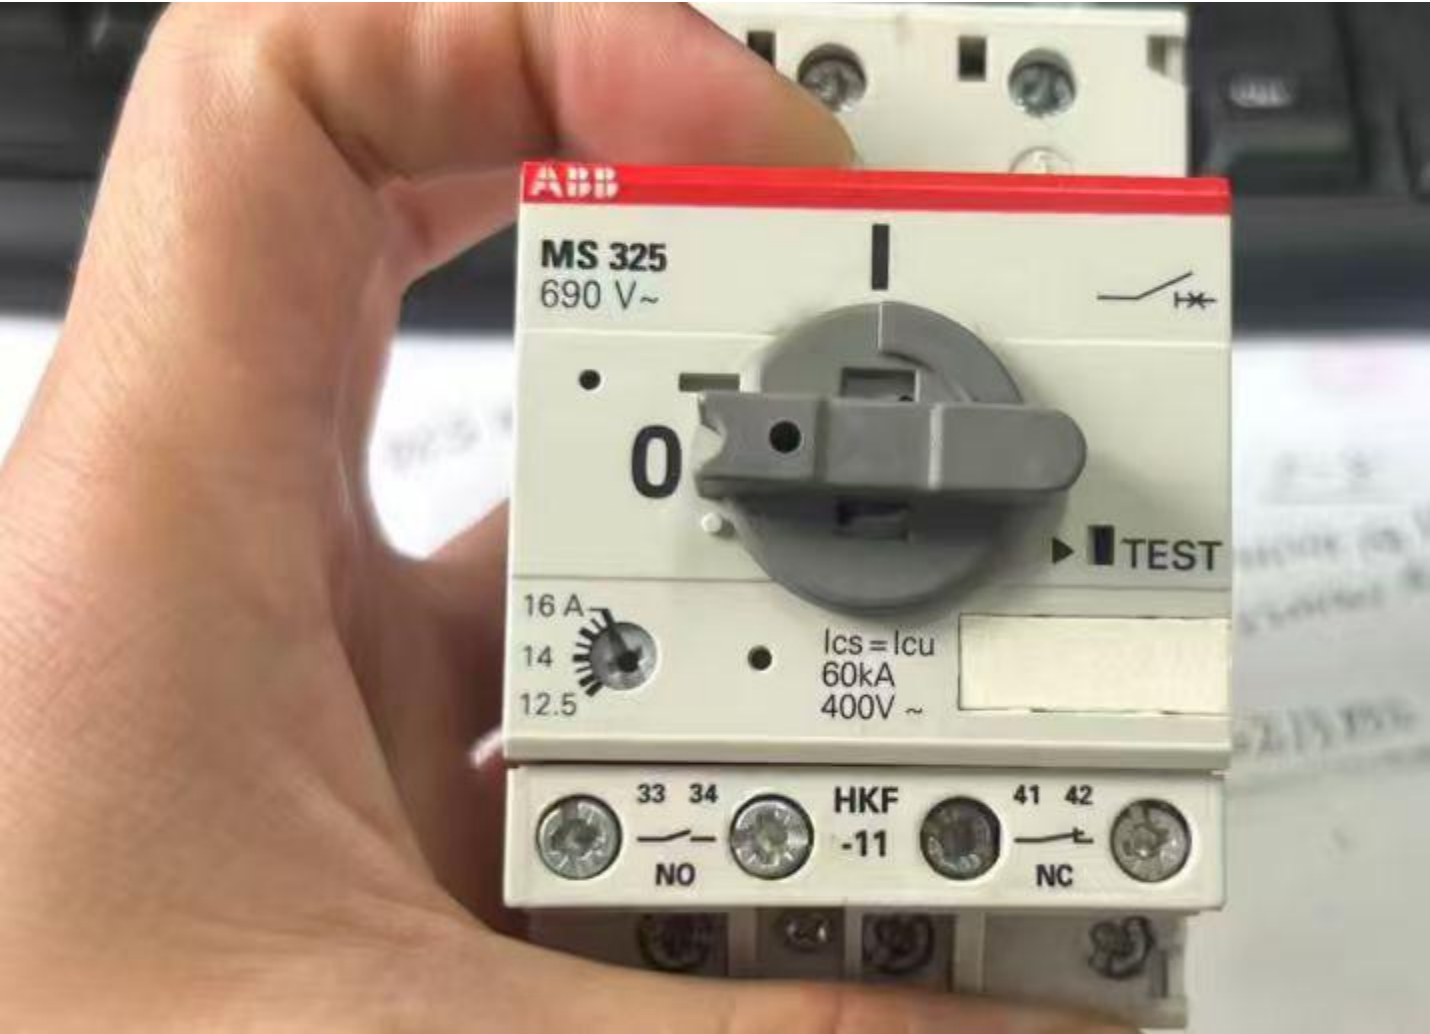
c UL US LISTED 7C05

IND.CONT.EQ.

Suitable For Use On A Circuit Capable Of Delivering Not More Than 5000 rms Sym. Amps, 600V AC Max. Suitable For Group Installation On A Circuit Capable Of Delivering Not More Than 50kA rms Sym. Amps, 600V AC Max., When Protected By Fuses Or Circuit Breakers Rated 1200 Amps, 600V AC Max.

V AC	120	240	480	600
HP;3ph	—	5	10	10
HP;1ph	1	2-1/2	—	—

Dial Settings are Full Load Motor Current. Always use all poles. Break All Lines; Trip Amps 125% Of FLA; Use 75°C Cu Wire Only. Torque 14 lb-in, 14-8 AWG, Trip Class 10, 16 Amps


ABB
MS 325
690 V~
0
TEST
16 A
14
12.5
Ics = Icu
60kA
400V ~
33 34
NO
HKF
-11
41 42
NC